

Description

Dynac Semi-Traction is a semi-traction battery which provides energy for onboard energy consumers of motorhomes, caravans and boats or trucks and buses. These onboard energy consumers, such as lighting, refrigerators and onboard computers or tail lifts, demand massive cyclic performance of a battery. Dynac Semi-Traction is resistant to deep discharges up to 50% and is suitable for seasonal use. Ideal for leisure vehicles with light to medium power consumers. Available in a range of 12V batteries from 50Ah to 230Ah in series wet charged and sealed maintenance free (SMF).

Performance

Nominal Voltage	12
Capacity	230Ah (20hr, 1.75V/cell)
Capacity	180Ah (5hr, 1.7V/cell)
RC 25A	460

Dimensions / Weight

Box Type	C
Dimensions	Length: 514 mm
	Width: 276 mm
	Height: 222 mm
	Total Height: 242 mm
Net Weight	59 Kg
Acid Volume	19.5

Technical Characteristics

Technology	Flooded Low Antimony
Seperator	PE

Charging instructions

Cycle use charge recommendation, Voltage	14.7
Cycle use charge recommendation, Max Amps	23
Float charge recommendation, Voltage	13.38
Float charge recommendation Max Amps	2.3
Cycles at 50% DoD	400





Features

- Reliable power supply
- Deep discharges up to 50%
- Ideal for seasonal use
- Available as wet charged or sealed maintenance free (SMF)
- Recommended for leisure vehicles with light to medium power consumers

Layout

Terminal

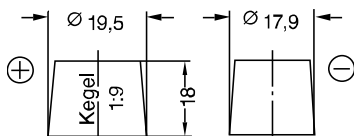

Battery Classifications as per EN 50342-6

Water Consumption	Charge Retention	Vibration Resistance	Endurance Level
W2	C2	V1	E2

(Note) All above information shall be changed without prior notice, Landport Batteries reserves the right to explain and update the latest information.